



OIL WELL PUMP PARTS AND ACCESSORIES

INSERT PUMP ANCHOR (9)


(see notes)

INSERT PUMP ANCHOR ASSEMBLY

TUBING SIZE		2-3/8"	2-7/8"	
THREAD SIZE	TOP PIN	1.4704-14	1.8024-14	
	BOTTOM BOX LINE PIPE	1"	1-1/4"	
RUBBER	O.D.	1.812"	2.250"	
	I.D.	1.015"	1.445"	
BODY	O.D.	1.169"	1.605"	
	I.D.	0.688"	1.125"	
SPLIT CONE O.D.		1.850"	2.290"	
ASSEMBLY NUMBER		9K	9N	
ITEM	NO. REQ'D.	DESCRIPTION	COMPONENT NUMBER	
A	1	Head	9K1	9N1
B	1	Rubber Pack-off	9K2	9N2
C	1	Split Cone	9K3	9N3
D	1	Retainer Ring	9K4	9N4
E	1	Body	9K5	9N5
F	1	Slip Assembly	9K6	9N6
G	1	Coupling	9K7	9N7

SLIP ASSEMBLY

SLIP ASSEMBLY NUMBER		9K6	9N6
ITEM	NO. REQ'D.	DESCRIPTION	COMPONENT NUMBER
1	3	Slip	9K6-1 9N6-1
2	2	Bushing	9K6-2 9N6-2
3	1	Guide Spool	9K6-3 9N6-3
4	3	Slip Spring	9K6-4 9N6-4
5	1	Pin	9K6-5 9N6-5
6	18	Rivet	9K6-6 9N6-6

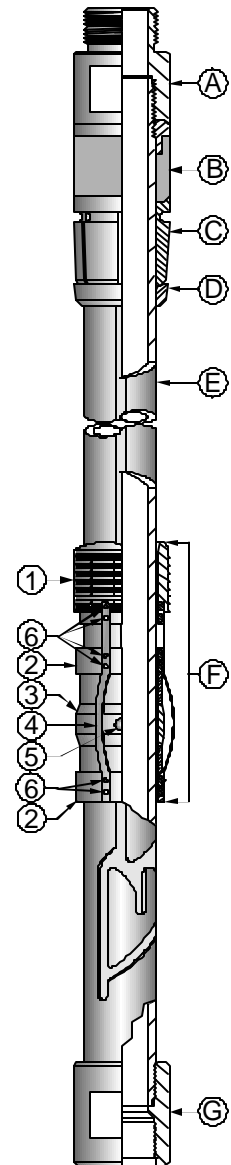

Notes:

- 1.) Rubber Pack-off material is a 70A Hardness Nitrile Buna-N.
- 2.) Slips material are Heat Treated Alloy Steel.
- 3.) Split cones are made of Alloy Steel.
- 4.) All other parts are made of Carbon Steel.