

PCP - Product Overview




Pump Model		Rate		Pressure		Rotor		Stator (refer to drawing for configuration)			
Netzsch Model	Imperial	B/D (rpm)	m ³ /d (rpm)	Psi	Bar	Lenght (in.)	Pin Size (in.)	Stator Length (in.)	Stator O.D. (in.)	Stop Pin Lenght (in.)	Stator Connection (API)
NTZ 166*090DT4.6	1300 -D-30			1300	90	102		83			
NTZ 166*100DT4.6	1500 -D-30	0,30	0,046	1500	100	112	0,9375	93	1,660	13,7	1.66" NUE
NTZ 166*120DT4.6	1800 -D-30			1800	120	128	API	109		13,7	
NTZ 238*120DT14	1800 -D-88			1800	120	149		128		13,8	
NTZ 238*150DT14	2200 -D-88			2200	150	190		159		23,6	
NTZ 238*180DT14	2600 -D-88	0,88	0,140	2600	180	221	0,9375	191	2,598	23,6	2.375" EUE/NUE
NTZ 238*200DT14	2900 -D-88			2900	200	249	API	219		23,6	
NTZ 238*240DT14	3500 -D-88			3500	240	287		256		23,6	
NTZ 278*120DT16	1800 -D-100			1800	120	126		103		13,7	
NTZ 278*150DT16	2200 -D-100			2200	150	161		128		23,6	
NTZ 278*180DT16	2600 -D-100	1,00	0,160	2600	180	186	1,1875	154	3,094	23,6	2.875" EUE/NUE
NTZ 278*200DT16	2900 -D-100			2900	200	209	API	177		23,6	
NTZ 278*240DT16	3500 -D-100			3500	240	239		207		23,6	
NTZ 278*120DT20	1800 -D-126			1800	120	151		128		13,7	
NTZ 278*150DT20	2200 -D-126			2200	150	195		162		23,6	
NTZ 278*180DT20	2600 -D-126	1,26	0,200	2600	180	226	1,1875	194	3,094	23,6	2.875" EUE/NUE
NTZ 278*200DT20	2900 -D-126			2900	200	251	API	219		23,6	
NTZ 278*240DT20	3500 -D-126			3500	240	289		256		23,6	
NTZ 278*120DT25	1800 -D-157			1800	120	181		159		13,7	
NTZ 278*150DT25	2200 -D-157			2200	150	233		201		23,6	
NTZ 278*180DT25	2600 -D-157	1,57	0,250	2600	180	272	1,1875	240	3,094	23,6	2.875" EUE/NUE
NTZ 278*200DT25	2900 -D-157			2900	200	304	API	272		23,6	
NTZ 278*240DT25	3500 -D-157			3500	240	350		318		23,6	
NTZ 278*120DT32	1800 -D-200			1800	120	229		207		13,7	
NTZ 278*150DT32	2200 -D-200			2200	150	289		257		23,6	
NTZ 278*180DT32	2600 -D-200	2,00	0,320	2600	180	339	1,1875	307	3,094	23,6	2.875" EUE/NUE
NTZ 278*200DT32	2900 -D-200			2900	200	380	API	347		23,6	
NTZ 278*240DT32	3500 -D-200			3500	240	443		410		23,6	
NTZ 350*120DT33	1800 -D-208			1800	120	157		133		13,7	
NTZ 350*150DT33	2200 -D-208			2200	150	199		165		23,6	
NTZ 350*180DT33	2600 -D-208	2,08	0,330	2600	180	234	1,3750	201	3,748	23,6	3.50" EUE/NUE
NTZ 350*200DT33	2900 -D-208			2900	200	260	API	227		23,6	
NTZ 350*240DT33	3500 -D-208			3500	240	299	1,5625	266		23,6	
NTZ 350*100DT40	1500 -D-250			1500	100	161	1,3750	138		13,7	
NTU 350*150DT40	2200 -D-250	2,50	0,400	2200	150	171	API	138	3,748	23,6	3.50" EUE/NUE
NTZ 350*200DT40	2900 -D-250			2900	200	309	1,5625	275		23,6	
NTZ 400*120DT50	1800 -D-315			1800	120	189	1,3750	164		13,7	
NTZ 400*150DT50	2200 -D-315			2200	150	241	API	207		23,6	
NTZ 400*180DT50	2600 -D-315	3,15	0,500	2600	180	281	1,5625	247	4,000	23,6	
NTZ 400*200DT50	2900 -D-315			2900	200	313	API	279		23,6	4" NUE *
NTZ 400*240DT50	3500 -D-315			3500	240	362		328		23,6	
NTZ 400*120DT66	1800 -D-415			1800	120	241		216		13,7	
NTZ 400*150DT66	2200 -D-415			2200	150	304		269		23,6	
NTZ 400*180DT66	2600 -D-415	4,15	0,660	2600	180	356	1,5625	322	4,000	23,6	4" NUE *
NTZ 400*200DT66	2900 -D-415			2900	200	398	API	363		23,6	
NTZ 400*240DT66	3500 -D-415			3500	240	465		430		23,6	

Pump Model		Rate		Pressure		Rotor		Stator (refer to drawing for configuration)			
Netzsch Model	Imperial	B/D (rpm)	m ³ /d (rpm)	Psi	Bar	Length (in.)	Pin Size (in.)	Stator Length (in.)	Stator O.D. (in.)	Stop Pin Length (in.)	Stator Connection (API)
NTZ 400*120DT83	1800 -D-522			1800	120	297		273		13,7	
NTZ 400*150DT83	2200 -D-522	5,22	0,830	2200	150	370	1,5625	336		23,6	
NTZ 400*180DT83	2600 -D-522			2600	180	444	API	409	4,000	23,6	4" NUE *
NTZ 400*200DT83	2900 -D-522			2900	200	474		450		23,6	
NTZ 400*090DT110	1300 -D-692			1300	90	296		27		13,7	
NTZ 400*120DT110	1800 -D-692	6,92	1,100	1800	120	385	1,5625	360	4,000	13,7	4" NUE
NTZ 400*150DT110	2200 -D-692			2200	150	476	API	452		23,6	4" NUE
NTZ 450*120DT74	1800 -D-465			1800	120	193		168		13,7	
NTZ 450*150DT74	2200 -D-465			2200	150	247		213		23,6	
NTZ 450*180DT74	2600 -D-465	4,65	0,740	2600	180	288	1,5625	254	4,803	23,6	4,5" EUE/ NUE**
NTZ 450*200DT74	2900 -D-465			2900	200	321	API	287		23,6	
NTZ 450*240DT74	3500 -D-465			3500	240	371		337		23,6	
NTZ 450*090DT150	1300 -D-943			1300	90	279		254		13,7	
NTZ 450*120DT150	1800 -D-943	9,43	1,500	1800	120	362	1,5625	337	4,803	13,7	4,5" EUE/ NUE**
NTZ 450*150DT150	2200 -D-943			2200	150	457	API	423		23,6	
NTZ 500*120DT138	1800 -D-868			1800	120	267		242		13,7	
NTZ 500*150DT138	2200 -D-868	8,68	1,380	2200	150	336	1,5625	301	5,000	23,6	5" LTC
NTZ 500*180DT138	2600 -D-868			2600	180	395	API	360		23,6	
NTZ 500*200DT138	2900 -D-868			2900	200	445		410		23,6	
NTZ 500*100DT170	1500 -D-1069			1500	100	271		247		13,7	
NTZ 500*150DT170	2200 -S-1069	10,69	1,700	2200	150	409	1,5625	374	5,000	23,6	5" LTC
NTZ 500*180DT170	2600 -S-1069			2600	180	469	API	434		23,6	
NTZ 500*090DT226	1300 -D-1421	14,21	2,260	1300	90	347	API	323	5,000	13,7	5" LTC
NTZ 500*120DT226	1800 -D-1421	14,21	2,260	1800	120	448	1,5625	423	5,000	13,7	

* Optional for Stator 4,000": Connection 3,500" Box EUE or 4,000 EUE

** Optional for Stator 4,500": Connection 4,000" Box NUE or 3,500" EUE

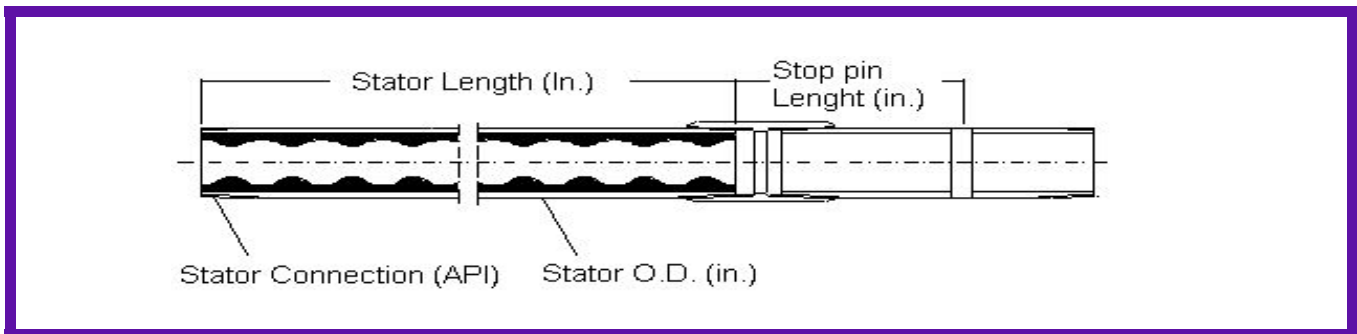

Global Presence

Addresses of all our representatives in 60 countries through the world you can find on:

www.netzsch.com.br



NETZSCH do Brasil
 Ind. E Com. Ltda.
 Rua Hermann Weege, 2383
 BR – 89.107-000 Pomerode / SC
 Phone: 55 (47) 3878222
 Fax: 55 (47) 3878400
 e-mail: info@ndb-netzsch.com.br